



Cyklobot

ROBOT WRAPPER



The Cyklobot is a mobile, semi-automatic stretch wrapper designed to bring flexibility and efficiency to your wrapping process. This innovative robot moves independently around the load, wrapping stretch film with precision and speed. Its electric mobility allows it to wrap pallets anywhere, whether in a warehouse, on the production floor, or at shipping stations, making it the perfect solution for businesses that need to wrap a variety of pallet sizes and shapes in different locations.

What sets the Cyklobot apart is its ability to handle heavy, irregularly shaped, or oversized loads with ease. Engineered to provide secure, stable wrapping, it ensures that your products are safely secured for transport, minimizing the risk of damage. The semi-automatic design gives operators the control they need while maintaining high efficiency, making it ideal for users who require versatility in wrapping a range of large and unusual pallets.

In essence, the Cyklobot is the ideal solution for those looking for a reliable, mobile, and easy to use stretch wrapping machine that can handle diverse wrapping needs in any environment, anytime.



EASY TO USE

- ✓ New tablet-based control system, always connected to the internet
- ✓ Incredible flexibility allows it to wrap pallets in any location
- ✓ Mobile and Space-Saving

EFFICIENT & SAFE


- ✓ Perfect for large & irregular loads
- ✓ Reduces wrapping time
- ✓ Drive wheels leave no marks on the hall floor

COST-EFFECTIVE

- ✓ 2 separate chargers on board for optimal battery leveling for increased battery life
- ✓ Saving film costs through pre-stretch technology up to 350%

OPTIONS

- ✓ Cutting device
Automatically tears the film once the wrapping cycle is complete
- ✓ Laser photocell
- ✓ Heavy-duty battery pack
- ✓ Lithium batteries
- ✓ Larger guide wheel

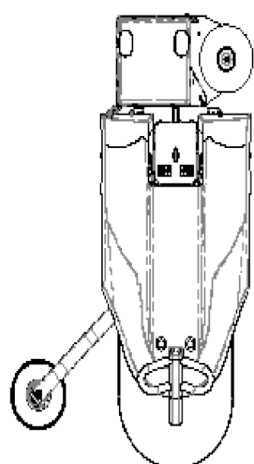

TECHNICAL DATA

Pallets per battery charge	250
Rotation Speed	50 - 80 m/min
Film Thickness	max. 25 µm
Film pre-stretch Cyklobot CFM	66%
Film pre-stretch Cyklobot CFE	150%
Film pre-stretch Cyklobot CPM1	250%
Film pre-stretch Cyklobot CPM2	350%
Pallet Dimensions Min.	600 x 600 mm
Min. Pallet Height	500 mm
Max. Pallet Height	2200 mm (option: max 3000)
Power Supply	115/230 V 50/60 Hz
Electrical Power supply	800 Watt
Batteries	2 x 100 Ah